

One vision, Two sharp eyes with Our Innovation

### TMS-4N

**Topographic Modeling System** 



- USB Connection
- Auto Shot Function
- Large Patient Database
- Easy Database Operation
- Multi-Language Operation
- Fourier Refractive Analysis
- Quick Data Reference
- Built-in LCD Alignment
- Other Applications

#### TMS-4N **SPECIFICATIONS**

#### **Measurement performance**

5.5 to 10.0 mm Spherical measurement range

(61.36 to 33.75 D)

Spherical measurement accuracy ±0.02 mm (Spherical)

#### **Auxiliary functions**

#### Measurement

Measurement type Ring cone 25 Ring numbers

Measurement points 6,400 maximum

Measurement points on a ring

Minimum / Maximum ring diameter Ø 0.46 to 8.8 mm (43D) Alignment Manual with auto-correction

< CL option only >

Ring numbers 31

Measurement points 7,300 maximum

Measurement points on a ring

Minimum / Maximum ring diameter Ø 0.57 to 10.9 mm (43D) Manual with auto-correction Alignment

**System Requirements** 

Operating System Windows®7 Professional (32bit,64bit)

> Windows®8.1 Professional (64bit) Windows®10 Professional (64bit) Intel® Core™2 Duo processor or higher

More than 512 MB Memory

Interface USB 2.0 (Connection with a main unit)

Display (Resolution) 800 x 600 or higher

Main unit

CPU

5.7 inch color LCD Display

296(W) x 508(L) x 448(H) mm Dimensions

Weight 14 kg

AC 100 to 240V, 50 / 60 Hz Power Supply

45 to 55 VA

Tomey GmbH [Europe]

Wiesbadener Straße 21

90427 Nürnberg, Germany

Class 1 Laser Class



#### **Tomey Corporation [Asia-Pacific]**

2-11-33 Noritakeshinmachi Nishi-ku, Nagoya, 451-0051, Japan Tel: ++81-52-581-5327 Fax: ++81-52-561-4735

E-mail: intl@tomey.co.jp

Tel: ++49-911-9385462-0 Fax: ++49-911-9385462-20 E-mail: info@tomey.de

#### For more information, visit our web site <a href="http://www.tomey.com">http://www.tomey.com</a>

Always read and follow the instructions for use. Not all products, services, or offers are approved or offered in every market. Please note that the current status of approval for the labeling, instructions, and contents of the brochure may vary from one country to another.

©2017 Tomey Corporation. Specifications are subject to change without notice. Any products mentioned herein are registered trademarks of their respective owners.

One vision, Two sharp eyes with Our Innovation

# TMS-4N

## **Topographic Modeling System**

A Decade of Achievement

Other Applications






One vision, Two sharp eyes with Our Innovation

TMS-4N
Topographic Modeling System

# Famous, Traditional, Reliable Topographer

Corneal Topographer Continues to Set the Standard for Resolution, Accuracy & Corneal Coverage.

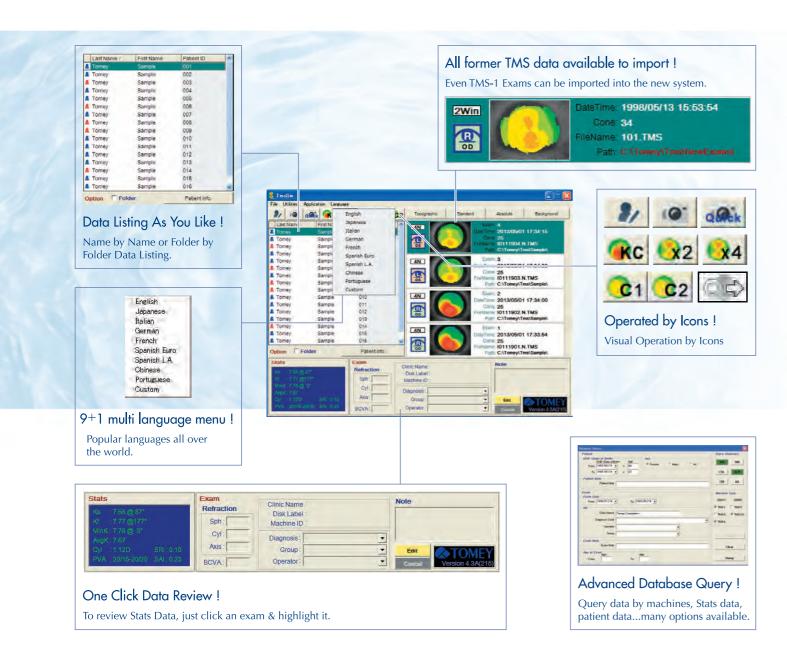

TMS-1 features return with better resolution, accuracy and easy operation. TOMEY's light cones use 25 or 31 rings (the same as TMS-1), providing high resolution.

The laser alignment system provides high accuracy and repeatability.


The small cone design eliminates nose & brow shadow and provides extensive corneal coverage.

The low light level of the rings promotes patient comfort.


The TMS-4N has comprehensive software: Single, Dual, Multiple and you can even customize your own map with a favorite scale, map type and so on. Fourier Analysis provides the refractive information with Spherical Equivalent, Regular Astigmatism, Asymmetry and Higher Order Irregularity. Fourier Analysis provides the refractive information with 3mm and 6mm diameter ranges. Software applications, for Klyce Statistics, Enhanced Height and Height Change Maps are also available.




Placido Light Cone

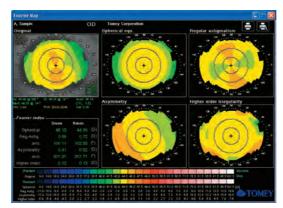


Fourier Analysis

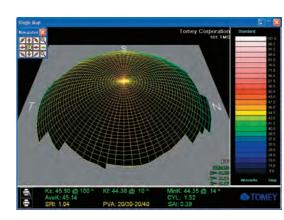

3D Corneal Map

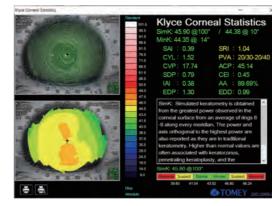

Klyce Corneal Statistics

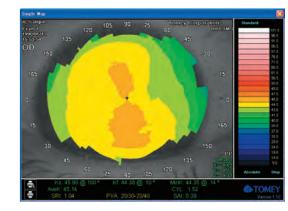

Single Corneal Map

#### **Statistical Indices**

Simulated K, Minimum K, Average Corneal Power, Potential Visual Acuity, Surface Regularity Index, Surface Asymmetry Index, Corneal Eccentricity Index, Irregular Astigmatism Index, Standard Deviation of Corneal Power, Analyzed Area, Elevation/Depression Power, Elevation/Depression Diameter, Simulated Keratometric Cylinder Change.

#### Contact Lens Software (Option)

User-defined Fitting Strategies, User-defined Lens Designs, Simulated Fluorescein Patterns, Sagittal Tear Film Plots, Adjustment of Position, Rotation and Tilt, User Modifiable Data Base, Order Form Printout, Automatic Transmission of Data to Optical Lab.